


# Lenovo Emulex VFA5.2 - Netzwerkadapter - PCIe 3.0 x8 Low-Profile

10Gb Ethernet x 2 - für ThinkAgile VX Certified Node 7Y94 - 7Z12;  
ThinkAgile VX3320 Appliance; VX7820 Appliance

Gruppe	Netzwerkadapter / Schnittstellen
Hersteller	Lenovo
Hersteller Art. Nr.	00AG570
EAN/UPC	0889488109708

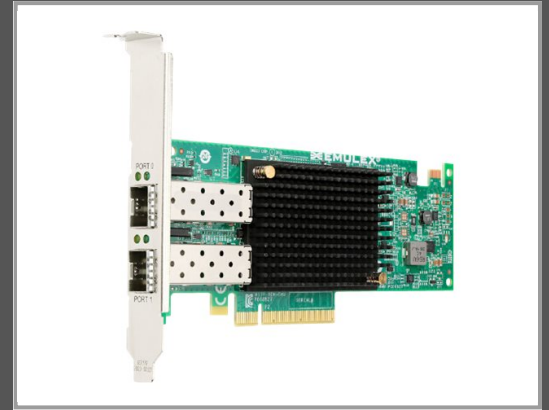

## Beschreibung

Emulex VFA5.2 - Netzwerkadapter - PCIe 3.0 x8 Low-Profile - 10Gb Ethernet x 2 - für ThinkAgile VX Certified Node 7Y94, 7Z12; ThinkAgile VX3320 Appliance; VX7820 Appliance

## Hauptmerkmale

Produktbeschreibung	Emulex VFA5.2 - Netzwerkadapter - PCIe 3.0 x8 - 10Gb Ethernet x 2
Gerätetyp	Netzwerkadapter
Formfaktor	Plug-in-Karte - Low-Profile
Schnittstellentyp (Bustyp)	PCI Express 3.0 x8
Ports	10Gb Ethernet x 2
Abmessungen (Breite x Tiefe x Höhe)	1.7 cm x 16.7 cm x 6.9 cm
Data Link Protocol	10 GigE
Datenübertragungsrate	10 Gbps
Kapazität	MAC-Adressen pro Port: 128
Netzwerk/Transportprotokoll	TCP/IP, UDP/IP
Produktzertifizierungen	IEEE 802.1Q, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.3ae, IEEE 802.3p, IEEE 802.1ab (LLDP), IEEE 802.1Qbb, IEEE 802.1Qaz, IEEE 802.1Qbg
Systemanforderungen	SuSE Linux Enterprise Server 11 for x86/AMD64/Intel EM64T, Red Hat Linux Enterprise Server 6 x64 Edition, Microsoft Windows Server 2012, Microsoft Windows Server 2012 R2, Red Hat Enterprise Linux 7, SUSE LINUX Enterprise Server 11 mit Xen für AMD64/EM64T, VMware vSphere 5.5 (ESXi), SuSE Linux Enterprise Server 12, VMware vSphere 6.0 (ESXi), SuSE Linux Enterprise Server 12 with Xen
Entwickelt für	ThinkAgile VX 1SE Certified Node; 1U Certified Node; ThinkAgile VX Certified Node 7Y94, 7Z12; ThinkAgile VX1320 Appliance; VX3320 Appliance; VX3520-G Appliance; VX3720 Appliance; VX5520 Appliance; VX7520 Appliance; VX7820 Appliance; ThinkSystem SD530; SR250; SR530; SR550; SR570; SR590; SR950; ST250

Technische Daten © 1WorldSync. Technische Änderungen und Irrtümer vorbehalten.